


#### Specifications



#### Key Features

- 1/2.8" Progressive Scan CMOS
- WDR>120dB
- FULL HD 1080P
- Triple Streams
- 3D DNR,ICR

#### Dimension

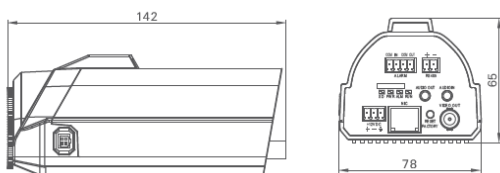

#### Accessories



CAMERA	
Image Sensor	1 / 2.8" Progressive Scan CMOS
Min. illumination	Color 0.1Lux(AGC ON);B&W 0.01Lux(AGC ON)
Day & Night	Auto ICR
Shutter Speed	1/50-1/64000
Auto Iris	Yes
Wide Dynamic Range	True WDR>120dB
Digital Noise Reduction	2D/3D
Lens	1 / 2.7" 2.7-12mm Megapixel lens
FOV	N/A
IR LED	Depends on IR illuminator housing
IR Range	Depends on IR illuminator housing
IMAGE	
Video Compression	H.264 High/Main/Baseline Profile, MJPEG
Bit Rate (CBR/VBR)	Main stream:500kb-8000kb ;Sub stream 100kb-6000kb
Audio Compression	G.711 ,RAW_PCM
Max.Resolution	1920x1080/30fps
Stream	Stream1 1920x1080/1280x720 Stream 2 D1 to QVGA Stream 3 1920x1080 to QVGA
Image Setting	Rotate Mode,Saturation,Brightness,Contrast,Sharpness
HLC	Auto
9:16 Corridor mode	N/A
DIS	N/A
ROI	N/A
Defog	N/A
NETWORK	
Network Protocols:	HTTP,HTTPS, TCP/IP, IPv4 , IPv6 ,UDP/IP, RTSP, DHCP, NTP, PPoE, Unicast and Multicast supported.
Alarm Trigger	Motion Detection,Network disconnect, Disk alarm,I/O alarm
RTSP Video	Standard RFC2326, Support QuickTime / VLC Player.
Security	User security authentication, Reset, Hardware WatchDog
Web Language	English, Chinese, Polish, Italian, Portuguese, Spanish.
System Compatibility	Onvif ,CGI
INTERFACE	
Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector
Audio I/O	1ch Audio In,1ch Audio Out
Alarm I/O	1ch Alarm In,1ch Alarm Out
RS485	Yes
BNC Output	Yes
Reset Button	Yes
Edge Storage	Micro SD/SDHC slot ,Max 32GB
GENERAL	
Power Supply	DC12V & IEEE802.3af (POE)
Power Consumption	5W(MAX)
Operating Temperature	-10°C~+50°C
Operating Humidity	0% - 90% RH
Ingress Protection	N/A
Approvals	CE / FCC / ISO9001 / ISO14001
Product Dimensions	142mm(D)x78mm(W)x65mm(H)
Product Weight	360g