


Specifications



Key features

- 1/2.8" Progressive Scan CMOS
- VF Lens 3.0-12mm
- WDR>120dB
- Full HD 1080P
- Triple Streams
- IR Range 30-40m
- 3D DNR,ICR

Dimension

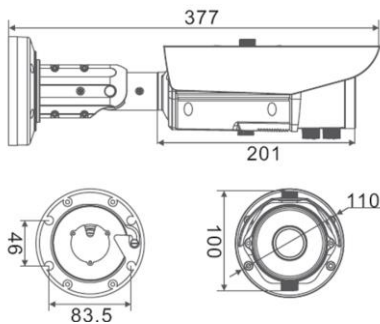

Accessories



CBK629



CBK633

| CAMERA | |
|-------------------------|---|
| Image Sensor | 1/2.9" Progressive Scan CMOS |
| Min. illumination | Color 0.1Lux;IR ON 0 Lux |
| Day & Night | ICR |
| Shutter Speed | 1/5-1/20000 |
| Auto Iris | Yes |
| Wide Dynamic Range | True WDR>120dB |
| Digital Noise Reduction | 2D/3D |
| Lens | 3.0-12mm Lens |
| FOV | 87° ~ 35° |
| IR LED | 17pcs |
| IR Range | 30-40m |
| IMAGE | |
| Video Compression | H.264 High/Main/Baseline Profile, MJPEG |
| Bit Rate (CBR/VBR) | Main stream:500kb-12000kb ;Sub stream 100kb-6000kb |
| Audio Compression | G.711 ,RAW_PCM |
| Max.Resolution | 1920x1080/30fps |
| Stream | Stream1 1920x1080/1280x720 Stream 2 D1 to QVGA Stream 3 1920x1080 to QVGA |
| Image Setting | Rotate Mode,Saturation,Brightness,Contrast,Sharpness |
| HLC | Auto |
| 9:16 Corridor mode | N/A |
| DIS | N/A |
| ROI | N/A |
| Defog | N/A |
| NETWORK | |
| Network Protocols: | HTTP,HTTPS, TCP/IP, UDP/IP, RTSP, IPv4, IPv6, DHCP, NTP, PPoE, Unicast and Multicast supported. |
| Alarm Trigger | Motion Detection,Network disconnect,Disk alarm,I/O alarm |
| RTSP Video | Standard RFC2326, Support QuickTime / VLC Player. |
| Security | User security authentication, Reset, Hardware WatchDog |
| Web Language | English, Chinese, Polish, Italian, Portuguese, Spanish.(Sunell Brand) |
| System Compatibility | Onvif |
| INTERFACE | |
| Ethernet | 1 Ethernet (10/100 Base-T) RJ-45 Connector |
| Audio I/O | 1ch Audio In,1ch Audio Out |
| Alarm I/O | Default Not support,Optional 1ch Alarm In,1ch Alarm Out |
| RS485 | N/A |
| BNC Output | Yes |
| Reset Button | Yes |
| Edge Storage | Micro SD/SDHC slot ,Max 32GB |
| GENERAL | |
| Power Supply | DC12V/POE |
| Power Consumption | 5W(IR LED OFF); 11W (IR LED ON) |
| OperatingTemperature | -10℃~+50℃ |
| Operating Humidity | 0% - 90% RH |
| Ingress Protection | IP66 |
| Approvals | CE / FCC / IOS9001/ IOS14001 |
| Product Dimensions | φ 110×377mm |
| Product Weight | 1680g |