

PS-F22AFHD

3 in 1 AHD 2.0MP Bullet Camera




Features:

- 2.0MP 1/2.7" low illumination CMOS sensor;
- HD 1080P Resolution, Image clear, Delicate;
- HD lens: 3.6mm, (2.8mm、 6mm optional);
- Day/Night(Auto ICR);
- Auto electronic shutter time;
- IR range: 18 SMD lights 20m-30m;
- Ingress Protection: IP66;
- 500 m transmission without delay;
- Support AHD, TVI, CVI
- Standard coaxial control
- Support coaxial upgrade
- Support XVI

Scenarios:

Apply to roads, warehouses, underground parking and other place which required definition picture quality.

Dimension:

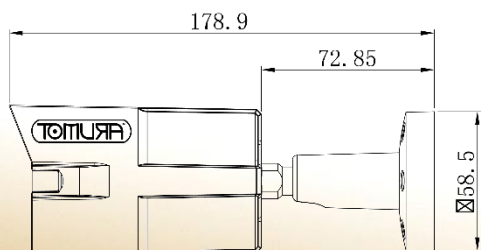

Parameters:

| | Model | PS-F22AFHD | |
|-----------|-----------------------|---|---|
| Camera | Sensor | 2.0MP 1/2.7" low illumination CMOS sensor | |
| | Signal | AHD/TVI/CVI@1080P | |
| | Min. illumination | Color: | 0.01Lux @(F1.2,AGC ON); 0 Lux with IR |
| | | B/W: | 0.001 Lux @ (F1.2,AGC ON),0 Lux with IR |
| | Shutter time | 1/50(1/60)s to 1/10,000 s | |
| | Lens | HD lens 3.6mm @F1.8 (2.8mm、 6mm optional) | |
| | Lens mount | M12 | |
| | Day&night | IR cut filter with auto switch | |
| | Max.image reolution | 1920*1080 | |
| Interface | Video output | 1Vp-p Composite Output(75Ω/BNC) | |
| | Audio I/O | N/A | |
| General | temperature | -10°C - + 60°C | |
| | humidity | 10%-90% RH | |
| | Power supply | DC12V±10% | |
| | IR range | 18 SMD lights "IR2" :20-30 meters | |
| | Consumption | MAX 3W | |
| | Material | PC plastic+metal | |
| | Ingress Protection | IP66 | |
| | Weight | Around 300g | |
| Dimension | 178.9mm*66.9mm*63.5mm | | |