



PS-PTM900E

แม่นยำ ถูกต้อง ทุกรายละเอียด

แบตเตอรี่ 10 ชั่วโมง


เครื่องทดสอบสาย LAN และกล้อง IP H.265 และ 3.0 AHD/CVI/TVI/ 4" 800x480 Pixel แบตเตอรี่ขนาดใหญ่ ใช้งานได้ยาวนาน 10 ชั่วโมง ทำงาน 22.2Wh

Combine Link Test

Link Speed
Fault indicator is
Shown when needed
Manual
Cable Limit

Data Flow monitor
Measure backbone flow
E.g. 500 Mbps

Packet Lost indicator

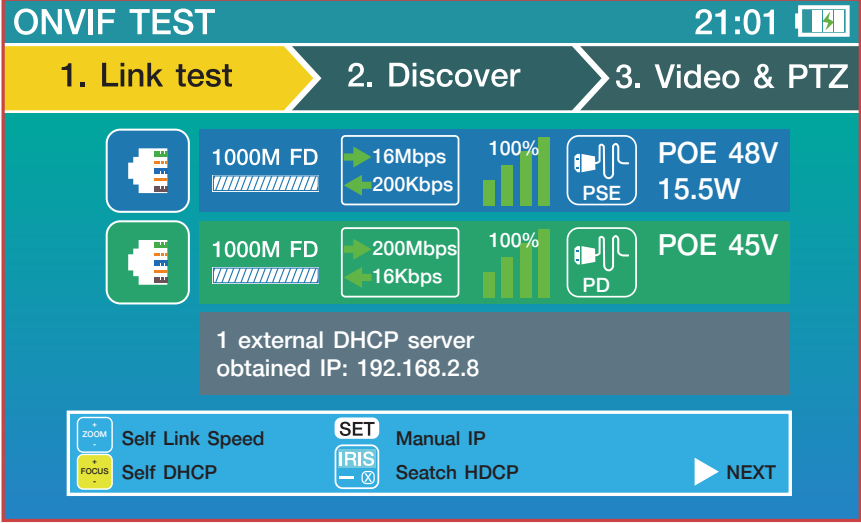

POE power output
POE 15.5W

POE power input
POE 45V

IP status


! Network loop detected
Shown automatically

User Experience : Green ok ; Yellow Need attention ; Red Mal-Function, need to be fixed.
Same principle poses though entrie tester software.

Dual Port 1000M Backbone Flow Measure



→ 360 Mbps
← 200 Kbps

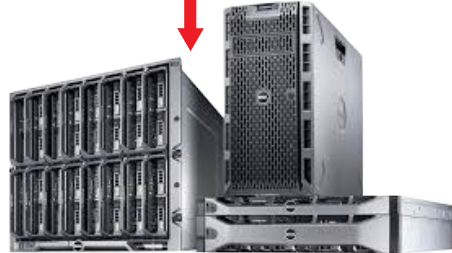

→ 200 Kbps
← 360 Mbps



Server Take a mesure, speak with data

Specification

Model	PS-PTM900E
IPC Test	
Prorocol	Onvif, RSTP, RTP
Ethernet Test	10/100/1000M Ethernet link test, loop detect, DHCP client and server Ethernet traffic flow monitor, link quality test
IP Configuration	Static IP/DHCP client / DHCP server
IPC Test	Discover camera, real time video, camera configuration, PTZ control, discover ONVIF devices across network segment
IPC Image Test	H.265/H.264 Encode, Support 4K@30FPS
Physical Port	Dual-port RJ45 Ethernet 1Gbps
POE Test	
PD Test	The tester is power input. 802.3at; power supply voltage detection
PSE Test	The tester is power input. 802.3 at; 25.5W Max, PD Actual power detection
Analog Test	
TV Signal Format	NTSC/PAL SD video Signal, HD-CVI, HD-CVI, HD-TVI, AHD, HD Video Signal Automatic adaptation
Signal Level	1Vpp
Video input /Output	Video IN BNC input, Video OUT BNC output
Video Digital Zoom, snapshots, video recording	8 time magnification, snapshots, video recording (H.264) (HD Coaxial can not support video)
Analog Video Generator	Generate PAL / NTSC video signal of various test pattern, Generate HD-CVI,TVI, AHD video signal of various test pattern (720P/1080P)
12V Power Output	
Power Output	12V/2A output, interface : circular outer diameter 4mm, inner needle 1.6mm.
Audio Test	
Audio Test	1 audio signal input
PTZ Control Test	
Interface	RS485, Coaxial input interface
Coaxial input interface	Coaxial PTZ control (dahua coax), Pelco-D/P, Samsung, Panasonic,Lilin, Yaan, etc. Moer than 30 kinds of agreements
Buad Rate	150, 300, 600, 2400, 4800, 9600, 19200 bps
LED Light	
LED Light	2 pcs 30 lm LED light, astigmatism
TDR RJ45 Cable Test	
RJ45 Cable Test	Test the lenght of four wire pairs. Maximum 200 maters, the solution of meter
Power	
Charger	POE Standart Power Injector
	48/15W output, AC100~230V 50~60Hz input
Battery	Dedicate battery, user replaceable, 7.4V lithium-ion polymer battery, capacity 22.2Wh, about 10 hours working time.
Charging	POE charging, power 10W max. Charging time 3~4 hours
Power Saving	Tester can be set to automatically switch overtime, battery power icon real-time display.
System Specification	
Screen	4.0 inch TFT 800*RGB*480 (WVGA) resolution, 16.7M Color,backlight brightness adjustable
Operation Method	Power key, 12 control keys, QWERTY Flip ketboard with 43 keys
Operation settings	Chinese, English, French, Spanish, Germany, Turkish, Russian, Czech, Hebrew, Romanian, Serbian, User Optional
Auto Power Off	Disable / 5~60 minutes
Keyboard Tone	Enable / Disable
Working environment and specifications	
Working temperature	-10~55 °C
Working Humidity	30%~90%
Dimensions	190x113x37mm