



Key Features

Easy installation and adjustment. Great night images with Super Flux IR LEDs for longer distances and high reliable LED lifecycle. Fixed lens for a fixed angle setup day/night images with an ICR.


Special

Small IR Bullet with the Effectus Solution. Fixed 3.6mm Lens. 3Axis Bracket with simple adjustment. Super Flux IR LEDs for 10-15M IR distance. Optional OSD for full control of Effectus Solution

Technology

Effectus solution. (Enhanced Fully Featured Engineered CCTV Technology, New image sensors realize high sensitivity approximately twice 191SII. A combination of a mega pixel progressive sensor with a DSP to match to give best possible TVL output. Processing images for Global tones temporal 3d Noise reduction Edge sharpness. Makes at truly outstanding latest product.

CAD Dimensions

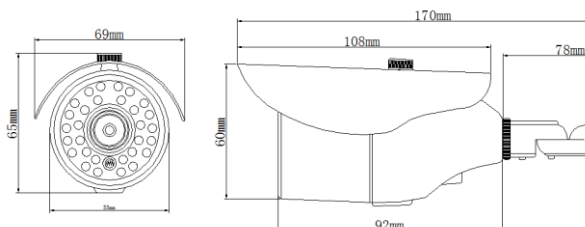

Specifications

Parameter	Details
CAMERA	
Sensor	1/3" 1.3Megapixel CMOS Sensor IMX
Max Resolution / FPS	1280x960 Pixels ; PAL:25fps ,NTSC:30fps
Min. illumination	0.001Lux @ (F1.2,AGC ON),0 Lux with IR 0.0005Lux @ (F1.4,AGC ON),0 Lux with IR
Day / Night	True Day / Night with ICR Filter.
IR LEDs	30pc Super Flux IR LED 850nm for 20 Meters (66 feet)
Lens	3.6mm board mount Lens IR Corrected (Horizontal Field of view 75°
Video Output	Optional on cable / OSD control
Electronic Shutter	PAL:1/50-1/50000 NTSC:1/60-1/60000
OSD Functions	
Supported Languages	English, Chinese.
Wide Dynamic Range	dWDR, OFF/ON(Level 0-8)/Auto
Digital Noise Reduction	2D/3D (On / Off)
White Balance	ATW/AWC-SET/Indoor/Outdoor/MANUAL
Gain	Level 0-15
Backlight	BLC/HLC/OFF
Output Interface	1ch HD Analogue ; 500m, 75-5
GENERAL	
Power	12v DC @ 100mA (275mA IR LED On)
Temperature	Operating: 14°F to 131°F (-10°C to 55°C) Storage: -4°F to 140°F (-20°C to 60°C)
Operating Humidity	0% - 85% RH
Approvals	CE / FCC / RoHS Compliant / IP66 / IK6
Product Dimensions	194 Φ170×69×65mm
Product Weight	360g (0.78lb)