

FEATURES



- ◆ 1/3" SONY Ex-View HAD CCD
- ◆ Resolution: 650TVL
- ◆ Min. illumination: 0Lux (IR ON)
- ◆ Electronic shutter adjustable, D-WDR, BLC
- ◆ IR distance: 100-120M, Third Generation IR leds , Low heat.
- ◆ OSD menu, IP66, cable bracket included, DC12V




WDR (Wide Dynamic Range)



HLC



Privacy Masking

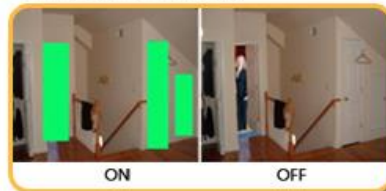

SPECIFICATION



Model	PS-401
Pick-up device	1/3" SONY Ex-view HAD CCD
Effective pixels	NTSC: 976x494, PAL: 976x582
Resolution	Color 650TVL, B/W 700TVL
Min. illumination	0lux(IR on)
Sync system	Internal
Scan system	2:1 interlace
S/N ratio	more than 50dB
Lens	16mm
Electronic shutter	Auto/Anti-flicker/Manual
Digital WDR	Off/On
BLC	BLC/OFF
White balance	ATW1/MANUAL/FIXED
2DNR	OFF/ON
Day & Night	Auto/B/W/Color/EXT
Privacy zones	Off/On(8 areas)
Mirror function	Off/On(Horizontal mirror)
Image adjustment	Contrast, Sharpness, Saturation
AGC	High/Mid/Low/Off
Gamma	0.45/Custom(0.05-1.0)
Display mode	CRT/LCD/USER
OSD menu	Simplified Chinese/English
Video output	1.0Vp-p Composite Video Output, 75 Ohm
IR distance	100-120m(3W Array IR 4pcs)
Power supply	12VDC
Power consumption(Max)	200mA/600mA(IR on)
Operation temp	-20°C ~ 50°C