

Small Dome Using Effectus



Key Features



Easy installation and adjustment. Great night images with Super Flux IR LEDs for longer distances and high reliable LED lifecycle. Fixed lens for a fixed angle setup day/night images with an ICR.


Special

Small IR Bullet with the Effectus Solution. Fixed 3.6mm Lens. 3Axis Bracket with simple adjustment. Super Flux IR LEDs for 20M IR distance. Optional OSD for full control of Effectus Solution

Technology

Effectus solution. (Enhanced Fully Featured Engineered CCTV Technology, New image sensors realize high sensitivity approximately twice 191DII. A combination of a mega pixel progressive sensor with a DSP to match to give best possible TVL output. Processing images for Global tones temporal 3d Noise reduction Edge sharpness. Makes at truly outstanding latest

CAD Dimensions

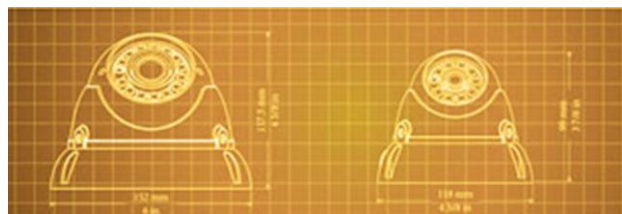

Parameter	Details
CAMERA	
Sensor	1/3" 1.3Megapixel CMOS Sensor
Max Resolution / FPS	1,200tvl Generated ; 1,305(H) x 1049(V)
Min. illumination	0.005 Lux (AGC On, IE Off) / 0 Lux with IR LED On
Day / Night	True Day / Night with ICR Filter.
IR LEDs	10pc Super Flux IR LED 850nm for 20 Meters
Lens	3.6mm board mount Lens IR Corrected (Horizontal Field of view 75°)
Video Output	Optional on cable / OSD control
Electronic Shutter	Auto
OSD Functions	
Supported Languages	English, Chinese.
WideDynamic Range	ON/OFF
DigitalNoise Reduction	3d (On / Off)
Display Mirror Flip	Horizontal & Vertical
Privacy Masking	8 User Area defined Windows
Backlight	Temporal, Center, Back, Global
Additional Notes:	4 Motion Detection areas. Settings for Sharpness, Edge
GENERAL	
Power	12v DC @ 100mA (275mA IR LED On)
Temperature	Operating: 14°F to 131°F (-10°C to 55°C) Storage: -4°F to 140°F (-20°C to 60°C)
Operating Humidity	0% - 85% RH
Approvals	CE / FCC / RoHS Compliant / IP66 / IK6
Product Dimensions	106mm x 96mm (4 x 2.8 inch)
Product Weight	400g (0.88lb)



ข้อแสงได้90% OFF



ข้อแสงได้90% ON