




FEATURE

- ◆ Plastics shell, Computer-keyboard-simulation design
- ◆ English LCD display
- ◆ Set different protocols and baud rates by RS485 control bus
- ◆ Built-in multiple control protocols, control different factories' speed domes
- ◆ RS485 control bus controls max 256 headend equipments
- ◆ All I/O ports are lighting-proof
- ◆ Multiple protocols are available for terminal speed doom control
- ◆ Password to lock/unlock and keyboard controller

DIMENSION

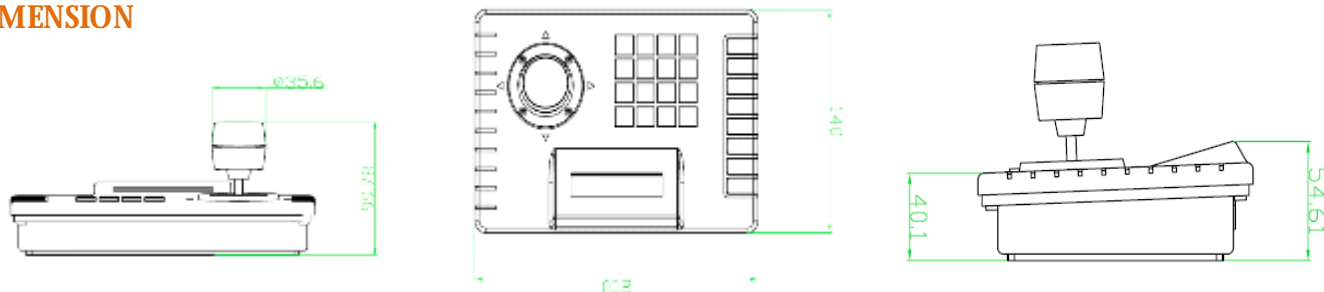

SPECIFICATIONS

Model	KT301
LCD display	English
Side panel	RJ45 port (connect RS485 line) 、 DC12V port
Camera control	Max 256 sets
Joy stick	Two/three dimension (left/right、 up/down、 zoom)
Len control	Iris: on/off Focus: near/far Zoom: enlarge/reduce
Camera outer-setting	Hoarfrost removal: on/off Rain wiper: on/off Auxiliary switch 1: on/off、 Auxiliary switch 2: on/off
PTZ control	Left/Right、 Up/Down、 Position-limit setting of scan Auto scan、 Pattern scan、 Auto cruise
Preset control	Save/Adjust preset position、 Preset position parameters setting、 Home position
Baud rate	1200bps、 2400bps、 4800bps、 9600bps、 19200bps、 38400bps
Control protocol	PEL-D、 PEL-P、 TopHID1、 TopHiP1、 TopHID2、 TopHiP2
Communication method	RS485 point -to-multipoint semiduplex communication
Transmission distance	0-1200 meters
Weight	0.65 kilogram
Circumstance condition	Temperature: -10~ +50, Humidity: ≤90%(no condensation)
Power supply	DC12V 500mA/50-60Hz