



# PS-209PTZD

## Pan Tilt Zoom Doom Camera Indoor/Outdoor

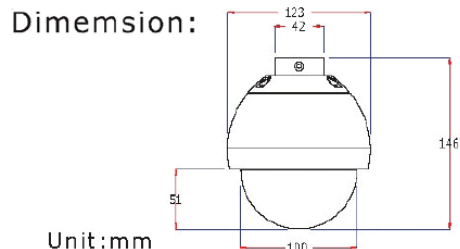

### Accessories:

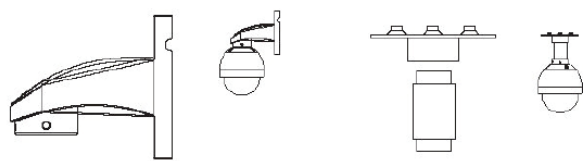

Wall Mount

Ceiling Mount

Dome Type	4" Indoor/Outdoor PTZ dome
Image Sensor	1/3"SONY CCD Effio-E DSP OSD-MENU
Picture Element	NTSC:976x494, PAL:976x582
Resolution	700 TVL
Minimum illumination	Color:0.06lux/F1.2, B/W:0.006Lux/F1.2
Lens	5-15mm
Optical Zoom	3X
DWDR	ON/OFF
DNR	2DNR (Y/C, Y, C, OFF)
Protection	IP66 for outdoor use (Wall Mount)
Tilt rotation	0° ~ 90°
Pan rotation	360° Continues rotation
Max Pan speed	60°/sec
Max Tilt speed	30°/sec
Preset speed	100°/Sec
Preset accuracy	±3°
Preset	32 Points
S/N ratio	>50dB
Pattern Tours	Programable 16 preset point Programable preset number
Auto Scan	Yes (Programable speed and left right limited point)
Power-off memory	Current setting and state (Include Pattern, Not include auto scan)
Home position	Yes (Programable auto come back home position)
Protocol	Pelco-P/D
Baudrate	1200/2400/4800/9600 bps
Address	0-255
Communication	RS485 (+/-)
Operating Temp	-5°C ~ 60°C
Power supply	DC 12V 500mA