




Key Features

- ◆ H.264/MJPEG
- ◆ 720P full real time recording
- ◆ Conforms to ONVIF
- ◆ Support mobilephone, IE browser,
- ◆ POE optional
- ◆ Lighting-proof, 3D bracket adjustable, DC12V

Dimension

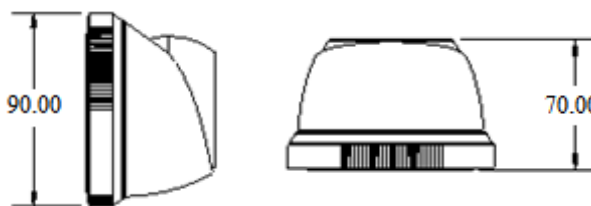

WIRE INTERFACE
1. Power Supply
2. Network Interface

SPECIFICATION

Parameter	Model	PS-620HD
Camera		
Sensor		1/4" OV 1.3 mega Progressive scan CMOS
Min. Illumination		0Lux/F1.4
Electronic shutter		Auto/Manual (1/25~1/10000)
Day/Night		Auto/B/W/Color/EXT ICR switching
Video Parameter		DWDR, Mirror, 3D Noise reduction, Sharpness/Lightness adjustable
IR Distance		10-15M(24*Φ5 IR leds)
Lens		3.6mm M12 2Mega lens
Lens interface		M12
AUDIO/VIDEO COMPRESSION		
Video compression		H.264/MJPEG
Encoding Features		Dual-stream; Main stream PAL: 1280X720 25fps; NTSC:1280X720 30fps
Max. resolution		1280X720
Encoding System		Constant bit rate, Variable bit rate optional
Video Bit rate		16Kbps-8000Kbps
Stream Type		Complex stream/Video stream
Audio Compression		G.711A
Audio Bit rate		64Kbps
NETWORK		
Password protection		Support
Character display		Support (Channel, Date)
Alarm function		Video loss, Network disconnect, Tampering alarm, Storage exception
Mobile surveillance		Apple, Android
Protocol		TCP/IP,UDP,HTTP,DHCP,RTP/RTSP,DNS,DDNS,NTP,PPPOE,UPNP,SMTP
Port protocol		18, ONVIF
INTERFACE		
Network Interface		RJ45 10M/100M adaptive
GENERAL		
Operating Conditions		-10°C ~ 55°C/0%~90%
Power Supply		DC12V
Power Consumption		<5W
Dimensions		70(H)*90(D)mm
Weight		192g
WIRE INTERFACE		
1、 Power Supply		
2、 Network Interface		