


Key Features

1. 1/3" CMOS with IR-CUT, 800TVL
2. 2pcs arrayed led, 4mm lens
3. IR distance : 30-50m;
4. IP protection range: IP66, high stability;
5. Day/Night, 2DNR, AWB, AGC, BLC;
6. Low power consumption, easy cooling, luminous evenly;
7. Support Smart IR function;
8. With wide voltage power supply design

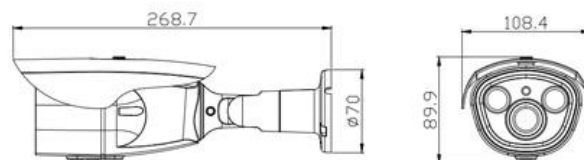

SPECIFICATION

Model	PS-735D
Pickup device	1/3"DIS
Number of Pixels	PAL:976(H)×582(V) NTSC:976(H) ×494(V)
Horizontal resolution	800TVL
System of Signal	PAL/NTSC
Mini illumination	0Lux/F1.2(IR ON)
Lens	4mm lens (6/8/12/16Optional)
S/N Ratio	>52dB
White Balance	Auto
Sync.System	Internal
AGC	Auto
Electronic Shutter	1/50(1/60)~1/100,000sec
Gamma Correction	>0.45
Backlight Compensation	Auto
Video Output	1.0Vp-p/75Ω