

# PS-HZ32


## IR LED Camera Series



LED ส่องสว่าง



ลักษณะการติดตั้ง

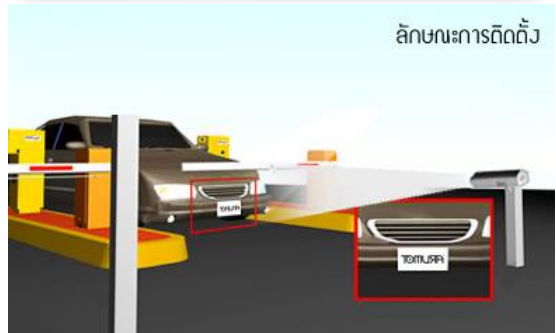

### SPECIFICATION

Model	PS-HZ32N
Pick-up device	1/3" SONY Supper HAD CCD
Effective Pixels	NTSC:976(H)*494(V) PAL:976(H)*582(V)
Sync system	Internal
Resolution	700TVL
Min. Illumination	Color:0.02Lux/F1.2 B/W:0.002Lux/F1.2 (sens-up) , 0Lux ( IR on )
S/N	More than 52dB
Electronic Shutter	Auto/Anti-flicker/Manual NTSC:1/60~1/100,000, PAL:1/50~1/100,000
Fliclerless Mode	On / Off
Lens mount	6-22mm Auto Iris ICR M12 Lens
Gamma	Auto/Manual
White Balance	ATW1/ATW2/AWC-SET/ANTI.CRL/MANUAL
AGC Gain Control	High/Mid/Low/Off
BackLight Compensation	HLC/BLC/OFF
Motion Detection	Off/On(4 areas)
Day & Night	Auto/B/W/Color/EXT
Video Output	1.0Vp-p Composite Video Output,75ohm
White LED distance	5-15meter
Power Supply	DC12V
Power Consumption	800mA ( Max )
Operating Temp.	-20C ~ 50C IP66