

Ultra Hi-Resolution OSD menu Vandal proof IR Box Camera

FEATURES



- ◆ 1/3" SONY Super HAD II CCD(960H)
- ◆ DSP: NVP2090
- ◆ Resolution: 700TVL
- ◆ Min. illumination: 0Lux (IR ON)
- ◆ Electronic shutter adjustable, D-WDR,BLC, HLC, Anti-flicker, Mirror, Motion detection, Lens shaded control, Privacy zones
- ◆ IR distance:40-50M, Constant current & SMART IR leds , brightness of IR leds adjustable
- ◆ Zoom and Focus adjustable outside
- ◆ OSD menu, IP66, Lightning proof, cable bracket included,DC12V




WDR (Wide Dynamic Range)



HLC



Privacy Masking

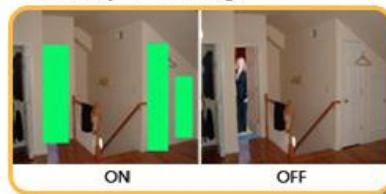

SPECIFICATION

Model	PS-TZ29D
Pick-up device	1/3" SONY Super HAD II CCD (960H)
Effective pixels	NTSC: 976x494,PAL: 976x582
Resolution	Color 700TVL
Min. illumination	0lux(IR on)
Sync system	Internal
Scan system	2:1 interlace
S/N ratio	more than 50dB
Lens	Auto Iris lens 4-9mm,2.8-11mm(optional) with ICR IR cut Filter
Electronic shutter	Auto/Anti-flicker/Manual
Digital WDR	Off/On(0-63 level adjustable)
BLC	HLC/BLC/OFF
White balance	ATW1/ATW2/MANUAL/FIXED
2DNR	OFF/ON
Day&Night	Auto/B/W/Color/EXT
Motion detection	Off/On(4 areas)
Privacy zones	Off/On(8 areas)
Mirror function	Off/On(Horizontal mirror)
Image adjustment	Contrast,Sharpness,Saturation
AGC	High/Mid/Low/Off
Gamma	0.45/Custom(0.05-1.0)
Display mode	CRT/LCD/USER
OSD menu	Simplified Chinese/English
Video output	1.0Vp-p Composite Video Output, 75 Ohm
IR distance	40-50m(IR leds: 48×Φ5)
Power supply	8-18VDC
Power consumption(Max)	200mA/600mA(IR on)
Operation temp	-20°C ~ 50°C