




**PS-9316MI**

### SPECIFICATION

- H.264 compression
- Supports VGA, BNC output
- Supports 16 CH recording
- Full screen on event, PIP, Sequence and Split screen 1,4,6,1A5, 1A7,8,9,1A12,16
- Support video streaming encode
- Supports 2 SATA HDD, Maximum 4TB
- Supports mainstreaming intelligent mobile phone surveillance function, One Mobile phone can monitor many DVR simultaneously
- S.M.A.R.T HDD self-monitoring Disk warning when failed.
- Super clear image HDMI High resolution

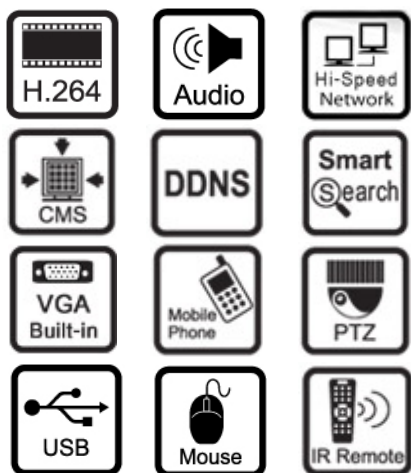

Model	PS-9316MI
Compression	H.264
OS	Embedded Linux
Video Input	16-CH
Video Output	Mainout HDMI*1, VGA*1, BNC Spot out*1
Video Loopout	NO
Display Resolution	HDMI/VGA: 1920 x 1080 CVBS:D1
Recording Resolution	D1,HD1, CIF
Frame Rate (PAL)	400fps @ CIF / 200fps@ Half-D1 / 100fps @ D1
Frame Rate (NTSC)	480fps @ CIF / 240fps@ Half-D1 / 120fps @ D1
Playback	16-CH
Digital Zoom	4X in live/Playback/I.E. /Safari /CMS
HDD Interface	2SATA
Audio Input	4-CH
Audio Output	1-CH
Alarm Input	16-CH
Alarm Output	1-CH
Password Protection	Authority configurable user
Log list	Motion/SENSOR/SYSTEM/OPERATION
Bidirectional talk	YES
Network Interface	10/100M or Giga (16CH) Ethernet self-adjustable,UPnP
DDNS	Built-in DDNS
Communication Interface	USB2.0*2, RS485*2, DVD-RW (optional)
PTZ Protocol	Pelco D, Pelco P, RANGE, VISCA, DSCP, VIDO, STAR, NEON, MINKING, LILIN
IR Controller	1
Recording Mode	Manual, Timer, Motion, Sensor
Multi Stream	Dual Stream: Master Stream for Record, Sub Stream for Network.
Search	DVR,IE,CMS,iPhone,iPad: time / Event /File management / snap shot
Cellphone software	"SuperLive" available for iOS , Andriod,BB,Symbian, WM
PC Viewer	AVI format
CMS	Standard version 64CH Dual Monitor , Local schedule record
Languages	Thai, English, Other 16 languages

\* Product Design and Specifications are subject to change without prior notice.