


## High resolution with OSD box menu camera



### FEATUERS

- ◆ 1/3" SONY Super HAD II CCD
- ◆ DSP: NVP2090
- ◆ Resolution: 700TVL
- ◆ Min. illumination: Color: 0.02Lux/F1.2; B/W: 0.002Lux/F1.2
- ◆ Electronic shutter adjustable, D-WDR, BLC, HLC, Anti-flicker, Mirror, Motion detection, Parking line, Lens shading control, Privacy zones
- ◆ OSD menu, Back focus adjustable, Lightning proof, DC12V



### High Resolution




### WDR (Wide Dynamic Range)



### HLC



### Privacy Masking

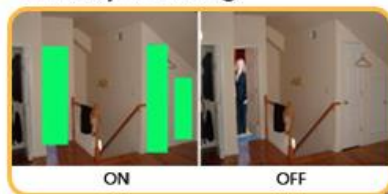

### SPECIFICATION

<b>Model</b>	<b>PS-TQ97</b>
<b>Pick-up device</b>	1/3" SONY Super HAD II CCD
<b>Effective pixels</b>	NTSC:976*494,PAL:976*582
<b>Resolution</b>	Color 700TVL
<b>Min. illumination</b>	Color: 0.02Lux/F1.2; B/W: 0.002Lux/F1.2
<b>Sync system</b>	Internal
<b>Scan system</b>	2:1 interlace
<b>S/N ratio</b>	more than 50dB
<b>Lens</b>	C/CS lens
<b>Electronic shutter</b>	Auto/Anti-flicker/Manual
<b>Digital WDR</b>	Off/On(0-63 level adjustable)
<b>BLC</b>	HLC/BLC/OFF
<b>White balance</b>	ATW1/ATW2/MANUAL/FIXED
<b>2DNR</b>	OFF/ON
<b>Day&amp;Night</b>	Auto/B/W/Color/EXT
<b>Motion detection</b>	Off/On(4 areas)
<b>Privacy zones</b>	Off/On(8 areas)
<b>Mirror function</b>	Off/On(Horizontal mirror)
<b>Image adjustment</b>	Contrast,Sharpness,Saturation
<b>AGC</b>	High/Mid/Low/Off
<b>Gamma</b>	0.45/Custom(0.05-1.0)
<b>RS-485 control</b>	Protocol:Pelco-D, Pelco-P, Nextchip Baud rate:2400-57600
<b>Display mode</b>	CRT/LCD/USER
<b>OSD menu</b>	Simplified Chinese/English
<b>Video output</b>	1.0Vp-p Composite Video Output, 75 Ohm
<b>Power supply</b>	DC12V± 10%
<b>Power consumption(Max)</b>	200mA/DC12V
<b>Operation temp</b>	-20°C ~ 50°C