




Key Features

- H.264 (high definition)
- 0Lux/F1.4
- Auto/Manual (1/25~1/10000)
- Auto/B/W/Color/EXT ICR switching
- DWDR, Mirror, 3D Noise reduction, Sharpness/Lightness adjustable
- 20-30M (30IR LED)
- 2.8mm 2Mega lens (6mm/8mm 5Mega lens optional)

Dimension

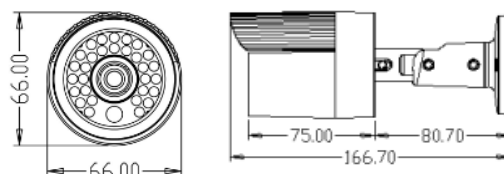

WIRE INTERFACE

1. Power Supply
2. Network Interface
3. Analog video output



SPECIFICATION

Model	PS-622HD-POE
Parameter	1.3 Mega 1/3 SONY CMOS IR Cylinder IP Camera
Camera	
Sensor	1/3" SONY 1.37 mega Progressive scan CMOS
Min. Illumination	0Lux/F1.4
Electronic shutter	Auto/Manual (1/25~1/100000)
Day/Night	Auto/B/W/Color/EXT ICR switching
Video Parameter	DWDR, Mirror, 3D Noise reduction, Sharpness/Lightness adjustable
IR Distance	20-30M (30IR LED)
Lens	2.8mm 2Mega lens (6mm/8mm 5Mega lens optional)
Lens interface	M12
AUDIO/VIDEO COMPRESSION	
Video compression	H.264
Encoding Features	Dual- stream ; Main stream PAL : 1280X720 25fps ; NTSC:1280X720 30fps
Max. resolution	1280X720
Encoding System	Constant bit rate ,Variable bit rate optional
Video Bit rate	16Kbps-8000Kbps
Stream Type	Complex stream/Video stream
Audio Compression	G.711A
Audio Bit rate	64Kbps
NETWORK	
Motion detection	Can be set to a single detection zone ,Multi-level sensitivity can be set
Privacy zones	4 zones
Snapshot	Support JPEG format , max. resolution based on encoding resolution
Password protection	Support
Character display	Support (Channel ,Date)
Alarm function	Video loss, Network disconnect, Tampering alarm, Storage exception
Mobile surveillance	Apple, Android
Protocol	TCP/IP,UDP,HTTP,DHCP,RTP/RTSP,DNS,DDNS,NTP,PPPOE,UPNP,SMTP
Port protocol	18, ONVIF
INTERFACE	
Network Interface	RJ45 10M/100M adaptive
Analog video output	1ch CVBS analog video output
GENERAL	
Operating Conditions	-10 ℃ ~ 55 ℃/0%-90%
IP Grade	IP66
Power Supply	DC12V /POE
Power Consumption	<6W
Dimensions	66(W)*66(H)*166.7(L)mm
Weight	400g